

8MFB160T US



General information

Battery name	8MFB160T US
Product Range	VLA Tubular Positive Plates
Polarity	DX
Technology	Flooded
Application	Light Motive Power / Leasuring
Standard ref.	EN 60254-1



The new FORCEblock range has been designed to be a complete and reliable solution for ALL those LIGHT MOTIVE POWER applications such as EV, cleaning machines, small pallet trucks, aerial platform and lifts, as well as wheelchairs and golf cart. Now available in vented and sealed version, both flat and tubular plates models can be defined to properly satisfy the specific application.

General characteristics

Voltage (V)	8
Capacity 5h	160
Capacity 20h (Ah)	190
Cold cranking Amps (CCA), EN (A)	
Energy at 20hrs rate and 25C (Wh)	1135
Cranking Power 10" at -18°C (KW)	

Dimensional group	BCI CG8
Sizes (LxWxH) (mm)	260 x 180 x 275
Base Hold-Down	B0
Lay-out/Terminals	0 / DIN
Battery weight \pm 5% (kg)	32.4

Box

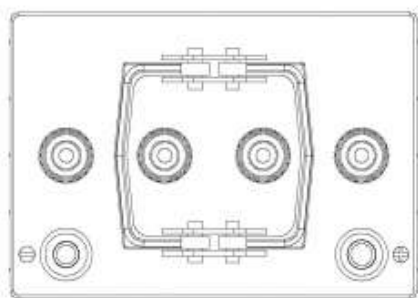
Case	PP/PE
Lid	PP/PE
Plug	PP/PE

Colour	Nat. Opaque
Colour	Black
Colour	Black

Drawings

Lay-out	Base hold down	Terminals type
---------	----------------	----------------

8MFB160T US

*BO*