

TECHNICAL DATA SHEET

PZS72

Applications



CYCLIC



SOLAR




MARINE

Voltage	:	12 V
Nominal Capacity	:	20h 96 Ah 5h 72 Ah 2h 56 Ah
Internal resistance	:	m Ohm
Dimensions LxWxH	:	352 x 175 x 190 mm
Technology	:	+ tubulare/tubular - piana/flat plate
Electrolyte	:	Acido Solforico - Sulphuric acid
Weight with Electrolyte	:	23 kg
Receipient	:	Polipropilene (PP) - Polypropylene (PP)
Charging current suggested	:	10 Ah
Operating temperature	:	-20°C ÷ 45°C
Cycle number	:	1200

Charging

Suggested Charging current	25A WA 20 IU1A
Operating Temperature	-20°C / 45°C
Storage Temperature	-20°C / 40°C
Cycle nr.	1200

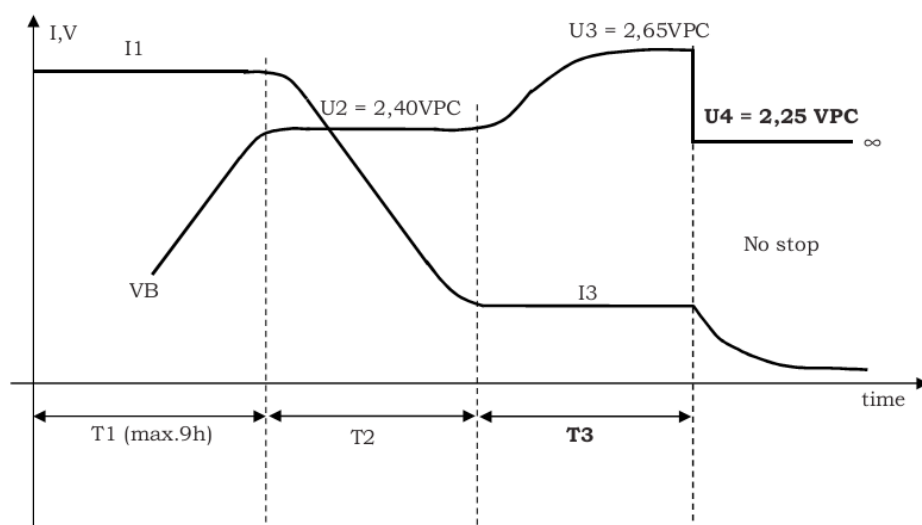

Duur: T1 + T2: De duur van de eerste twee fases is hoogstens 14u

Duur: T3: De duur T3 is gelijk aan de duur van de hoofdlading, dat is $t_3 = t_1 + t_2$, maar met een minimum van 1 tot 4h

T1 + T2 [h]

T3 [h]

< 1	2	3	4	> 4
1	2	3	4	4