

TECHNICAL DATA SHEET

PZS80

Applications



CYCLIC



SOLAR




MARINE

Code name	:	PZS80	
Voltage	:	12 V	
Nominal Capacity	:	20h	105 Ah
		5h	80 Ah
		2h	62 Ah
Internal resistance	:	m Ohm	
Dimensions LxWxH	:	352 x 174 x 215 mm	
Technology	:	+ tubulare/tubular - piana/flat plate	
Electrolyte	:	Acido Solforico - Sulphuric acid	
Weight with Electrolyte	:	28 kg	
Receipient	:	Polipropilene (PP) - Polypropylene (PP)	
Charging current suggested	:	13 Ah	
Operating temperature	:	-20°C ÷ 45°C	
Cycle number	:	1200	

Charging

Suggested Charging current	25A WA 20 IU1A
Operating Temperature	-20°C / 45°C
Storage Temperature	-20°C / 40°C
Cycle nr.	1200

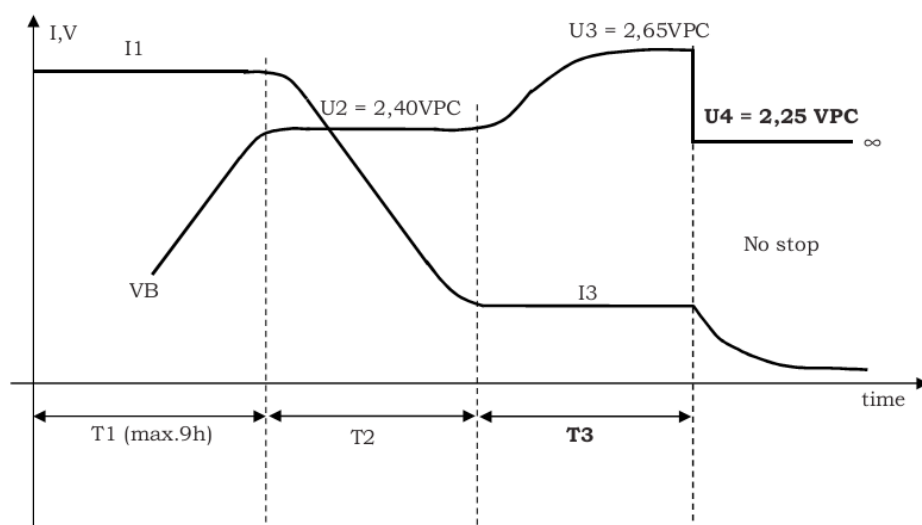

Duur: T1 + T2: De duur van de eerste twee fases is hoogstens 14u

Duur: T3: De duur T3 is gelijk aan de duur van de hoofdlading, dat is $t_3 = t_1 + t_2$, maar met een minimum van 1 tot 4h

T1 + T2 [h]

T3 [h]

< 1	2	3	4	> 4
1	2	3	4	4